

AC 350

Cummins
Mecc Alte
D+ &



ISO8528	GC ,) &-
SZUTEST	GC - \$\$\$%
CE	

2000/14/EC	&\$\$\$#(#
	z) \$' z' \$z ' D:

	"	"	"	"	Amp
400/230	350,00	280,00	300,00	240,00	433,00

fDGD	GC ,) &
), & z	fDF D
	%\$i % %&
	GC " \$(** z&(GC

Standard Specifications

z

fl ! E

z

z

ALTERNATOR

fl ! E

fl " E

fD \$\$\$ \$\$\$ E

fl " \$ E

TRANSFER SWITCH

fl ! E

AC 350

Cummins
Mecc Alte
D+' &'


Manufacturer		Cummins														
Model		QSL9-G5														
		<table border="1"> <tr> <td>%\$\$' "# "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>' %\$\$\$' "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Q %\$\$< DQ</td> <td></td> <td></td> <td></td> </tr> </table>			%\$\$' "# "				' %\$\$\$' "				Q %\$\$< DQ			
%\$\$' "# "																
' %\$\$\$' "																
Q %\$\$< DQ																
	L	8,800														
	"	114 X 145														
		16,8:1														
	fl # ı	"# "	1500													
	fl ı	L	26,50													
		L	28,60													
AbsorbedAirDischargeReSourceKey.Text	' # "	20,40														
	' # "	475,00														
	' # "	31,20														
	° C	560,00														
		24 V d.c.														
	Load	%\$\$ı	'+)ı)\$ı												
	# "															
		63,00	46,00	31,00												

		Mecc Alte		
		ECO38-3LN		
	Hz	50		
	"	350,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	505,00		

		fl ı		fl ı	
	"	"	"	"	L
AC 350	2630,00	2936,00	1300,00	1869,00	450,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	3450	4000	1300	1970	450

AC 350

Cummins
Mecc Alte
D+ &''

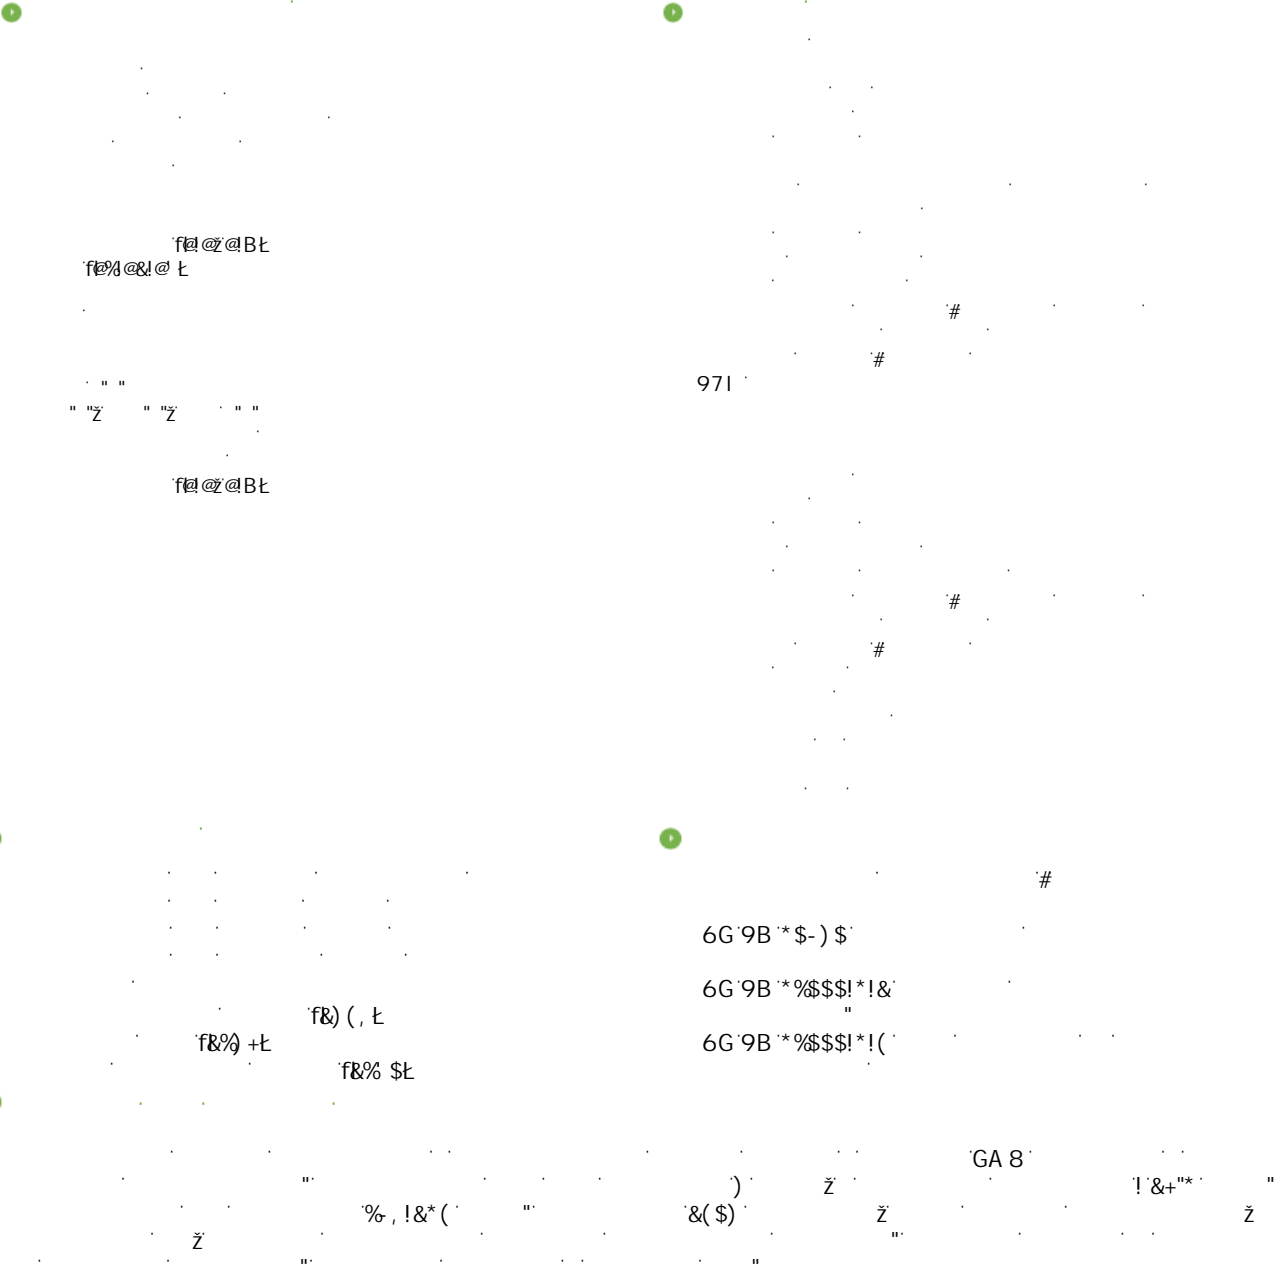

AC 350

Cummins
Mecc Alte
D+ &''



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1300
fl "L	"	4000
fl "L	"	1970
	L	450