

APD 880 M

Mitsubishi

D+ &



ISO8528

GC ,) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

	"	kw	"	kw	Amp
400/230	880,00	704,00	800,00	640,00	1156,00

fP GDE

GC ,) &

,) & z

fDF DE

%\$!

%

%&

GC " \$(*"

z&(

GC

Standard Specifications

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket water heater
- Steel base frame and anti-vibration isolators
- Fuel tank under the base frame
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation

TRANSFER SWITCH

APD 880 M

Mitsubishi


D+' &'



Manufacturer		Mitsubishi
Model		S12A2-PTA
		746,00 kw [1000,00HP]
	L	33,930
	"	150X160
		14,5:1
	"# "	1500
	L	120,00
	L	220,00
AbsorbedAirDischargeReSourceKey.Text	' # "	64,00
	' # "	1140,00
		24 V d.c.
	Load	%\$!i
	# "	171,00

		ECO43-1SN/4
	Hz	50
	"	800,00
7 cg'		0,80
		3
	fl 7	400/230


		fl 7		fl 7	
	"	"	"	"	L
APD 880 M	6965,00	4370,00	1972,00	2222,00	850,00
		fl 7		fl 7	
	"	"	"	"	L
AK 90	10115	6500	2200	2353	850

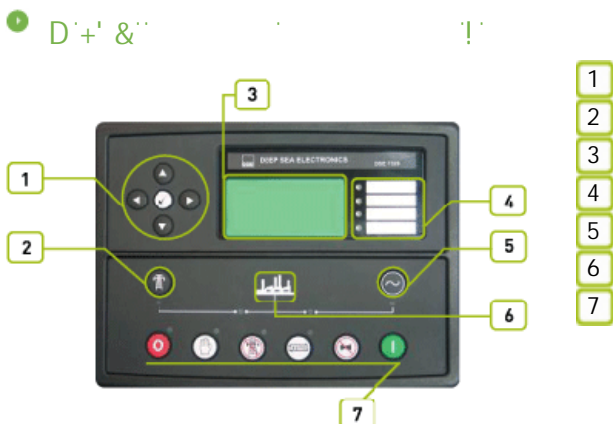

APD 880 M

Mitsubishi

D+ & "

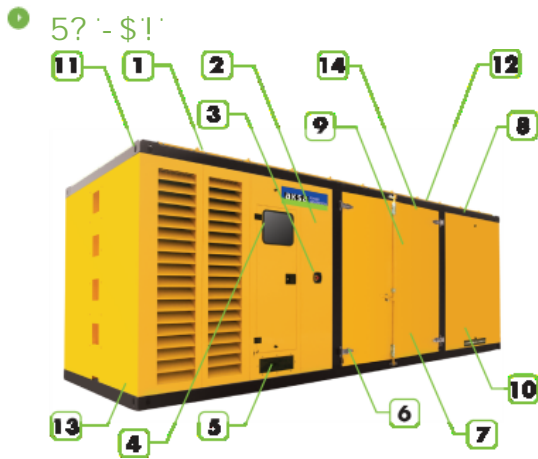

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the right side of the generator set
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2200
fl "L	"	6500
fl "L	"	2353
	L	850