

AD 580

Doosan
Mecc Alte
D+ &



ISO8528

GC ,) &

SZUTEST

GC - \$\$\$%

CE

2000/14/EC

&\$\$\$#(#

z) \$' z' z' D:

	"	kw	"	kw	Amp
400/230	580,00	464,00	525,00	420,00	758,00

fPQDE

GC ,) &

,) & z

fDF DE

%\$!

% %&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z'5JF

TRANSFER SWITCH

AD 580

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan		
Model	DP158LD		
		510,00 kw [683,00HP]	
	L	14,618	
	"	128 x 142	
		15,0:1	
	fl # 7	"# "	1500
	fl 7	L	22,00
		L	90,00
AbsorbedAirDischargeReSourceKey.Text	' # "	33,10	
	' # "	700,00	
	' # "	98,00	
	° C	591,00	
		24 V d.c.	
	Load	%\$i	'+) i
	# ") \$i	
		115,10	83,40 55,10

	Mecc Alte		
	ECO 40-1L/4		
	Hz	50	
	"	550,00	
7cg'		0,80	
		3	
	fl 7	400/230	
	A	794,00	

		fl 7		fl 7	
	"	"	"	"	L
AD 580		3106,00	1550,00	1994,00	700,00
		fl 7		fl 7	
	"	"	"	"	L
MS 70	4200	4460	1606	2477	700

AD 580

Doosan
Mecc Alte
D+' &''

f@z@Bl
f@z@Bl
" " " " " "
" " " " " "
f@z@Bl

971

f&) +L
f& % \$L

6G'9B '* \$-) \$
6G'9B '* \$\$\$! *!&
6G'9B '* \$\$\$! *!(

GA 8


% , !&* (

& (\$)

!&+''' "

AD 580

Doosan
Mecc Alte
D+ &

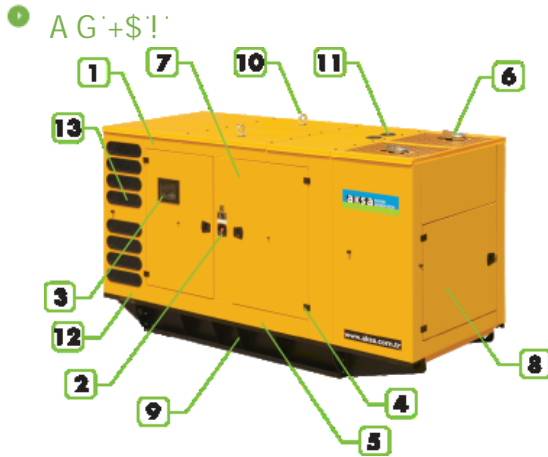

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700