

# AVP 450

Volvo Penta  
Mecc Alte  
D+ &



|                |              |
|----------------|--------------|
| <b>ISO8528</b> | GC, ) &      |
| <b>SZUTEST</b> | GC - \$\$\$% |
| <b>CE</b>      |              |

2000/14/EC & \$\$\$#( #  
z) \$ z' z' D:

|         | kw     | Amp    |
|---------|--------|--------|
| 400/230 | 450,00 | 591,80 |
|         | 360,00 |        |
|         | 410,00 |        |
|         | 328,00 |        |

fP GDE GC, ) &  
fDF DE % \$! % % & GC " \$ ( \* z & GC

**Standard Specifications**

z  
fl ! E  
z  
z

**ALTERNATOR**

fl E  
fl " E  
fl \$\$\$ \$\$\$ E  
fl " \$ E

**TRANSFER SWITCH**

fl

# AVP 450

Volvo Penta  
Mecc Alte  
D+' &'



|                                      |        |                         |       |        |
|--------------------------------------|--------|-------------------------|-------|--------|
| Manufacturer                         |        | Volvo Penta             |       |        |
| Model                                |        | TAD1344GE               |       |        |
|                                      |        | % \$ \$ ' "# "          |       |        |
|                                      |        | 399,00 kw<br>[543,00HP] |       |        |
|                                      | L      | 12,780                  |       |        |
|                                      | "      | 131X158                 |       |        |
|                                      |        | 18,1:1                  |       |        |
|                                      | fl # ı | "# "                    | 1500  |        |
|                                      | fl "ı  | L                       | 36,00 |        |
|                                      |        | L                       | 44,00 |        |
| AbsorbedAirDischargeReSourceKey.Text | ' # "  | 28,00                   |       |        |
|                                      | ' # "  | 390,00                  |       |        |
|                                      | ' # "  | 67,50                   |       |        |
|                                      | ° C    | 465,00                  |       |        |
|                                      |        | 24 V d.c.               |       |        |
|                                      | Load   | % \$ \$ ı               | '+) ı | ) \$ ı |
|                                      | # "    | 83,10                   | 63,30 | 42,80  |

|       |      |            |  |  |
|-------|------|------------|--|--|
|       |      | Mecc Alte  |  |  |
|       |      | ECO40 2S/4 |  |  |
|       | Hz   | 50         |  |  |
|       | "    | 450,00     |  |  |
| 7 cg' |      | 0,80       |  |  |
|       |      | 3          |  |  |
|       | fl ı | 400/230    |  |  |
|       | A    | 649,50     |  |  |


|         |      |         |         |         |        |
|---------|------|---------|---------|---------|--------|
|         |      | fl "ı   |         | fl "ı   |        |
|         | "    | "       | "       | "       | L      |
| AVP 450 |      | 3213,00 | 1550,00 | 1855,00 | 700,00 |
|         |      | fl "ı   |         | fl "ı   |        |
|         | "    | "       | "       | "       | L      |
| MS 70   | 4200 | 4460    | 1606    | 2477    | 700    |

# AVP 450

Volvo Penta  
Mecc Alte  
D+' &'



## 1 D+' &'

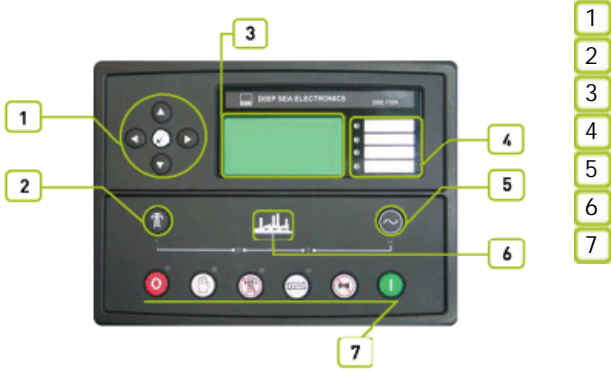

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

% &1 \*(' žFG&' &žFG(,) ž

# AVP 450

Volvo Penta  
Mecc Alte  
D+ &



f@#@Bt  
f@#@Bt

"z" "z"

f@#@Bt

971

#

#

#

#



f&)+t

f&)(, t

f&)% \$t

6G'9B '\*\$-)\$

6G'9B '\*\$\$\$!\*!&

6G'9B '\*\$\$\$!\*!(

#



ž

%, !&\*(

&(\$)

ž

ž


GA 8

!&+""

ž

# AVP 450

Volvo Penta  
Mecc Alte  
D+ &

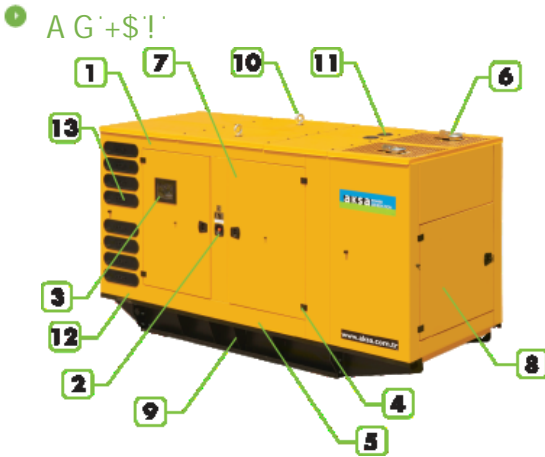

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

|       |   |      |
|-------|---|------|
|       | " | 1606 |
| fl "L | " | 4460 |
| fl "L | " | 2477 |
|       | L | 700  |