

APD 1250 C

Cummins
Aksa
D+' &'



Manufacturer		Cummins		
Model		KTA 38-G9		
		% \$ \$	"# "	
		1089,00 kw [1460,00HP]		
	L	37,800		
	"	159 X 159		
		13,9:1		
	fl # ı	"# "	1500	
	fl ı	L	135,00	
		L	279,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	78,54		
	' # "	573,00		
fl ' # ı	' # "	212,40		
	° C	529,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "			
		256,00	196,00	137,00

		Aksa		
		AK7910		
	Hz	50		
	"	1137,50		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	1641,80		

		fl ı		fl ı	
	"	"	"	"	L
APD 1250 C	8600,00	4560,00	1850,00	2300,00	
		fl ı		fl ı	
	"	"	"	"	L
AK 96	13100	7500	2300	3170	1500

APD 1250 C

Cummins
Akso
D+' &''



f@#@Bt
f@#@@t

"z" "z" "z"

f@#@Bt

971

f&%) +t

f&)(, t

f&% \$t

6G'9B '*\$-) \$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

GA 8


%, !&*(

&(\$)

!&+""

APD 1250 C

Cummins
Aksa D+' &'

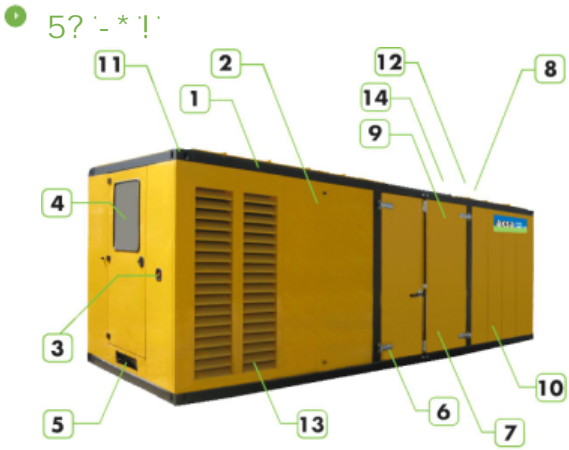

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	3170
	L	1500