


# AD 330

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	330,00	264,00	300,00	240,00	433,00

fP GDE

GC, ) &

,) & z

fDF DE

%\$1

% % %&

GC " \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D: A Z 5J F

## TRANSFER SWITCH

# AD 330

Doosan  
Mecc Alte  
D+' &'

Manufacturer		Doosan		
Model		P126TI-II		
		% \$ \$	"# "	
		294,00 kw [394,00HP]		
	L	11,050		
	"	123 x 155		
		17,0:1		
	fl # ı	"# "	1500	
	fl ı	L	23,00	
		L	65,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	20,10		
	' # "	295,00		
fl ' # ı	' # "	47,40		
	° C	590,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı	) \$ı
	# "			
		63,10	47,00	31,30

		Mecc Alte		
		ECO 38-2LN/4		
	Hz	50		
	"	300,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	433,00		
Temperature		H		

		ıfl ı		ıfl ı	
	"	"	"	"	L
AD 330	2375,00	2950,00	1300,00	1588,00	450,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 60	3065	3960	1356	2097	470



# AD 330

Doosan  
Mecc Alte  
D+' &''

f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '\*\$-\$)'\$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+''

%, !&\*(

&(\$)


ž

ž

ž

# AD 330

Doosan  
Mecc Alte  
D+ &''

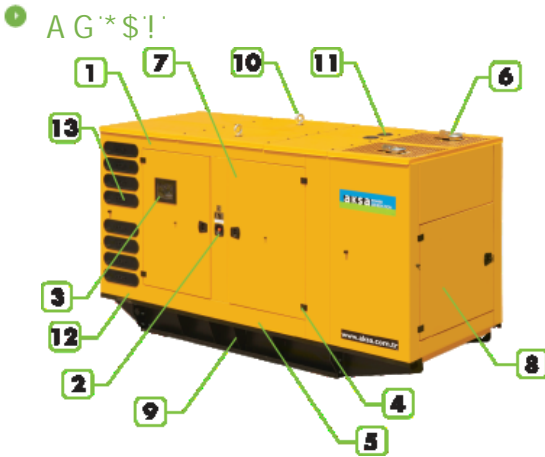

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470