


AJD 275

John Deere
Mecc Alte
D+ &



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC
 &\$\$\$#(#
 z) \$ z'z' D:

	"	kw	"	kw	Amp
400/230	275,00	220,00	250,00	200,00	361,00

fPQDE GC ;) &
) & z fDFD % \$ % % & GC " \$ (** z& GC

Standard Specifications

z
 fi ! E
 z
 z

ALTERNATOR
 fi " E
 fPQ \$\$\$ \$\$\$ E
 fi " \$ E

TRANSFER SWITCH

fi " \$ E

AJD 275

John Deere
Mecc Alte
D+' &''

Manufacturer		John Deere		
Model		6088HFG55		
		% \$ \$' "# "		
		250,00 kw [355,00HP]		
	L	6,800		
	"	106x127		
		17,2:1		
	fl # ı	"# "	1500	
	fl ı	L	33,00	
		L	31,20	
AbsorbedAirDischargeReSourceKey.Text	' # "	14,50		
	' # "	301,00		
	' # "	37,30		
	° C	523,00		
		12 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "	53,00	37,80	26,50


		Mecc Alte		
		ECO 38-1LN/4		
	Hz	50		
	"	250,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	361,00		
Temperature		H		

		ıfl ı		ıfl ı	
	"	"	"	"	L
AJD 275	1970,00	2750,00	1300,00	1350,00	470,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 60	2680	3960	1356	2097	470

AJD 275

John Deere
Mecc Alte
D+' &'

1 D+' &'

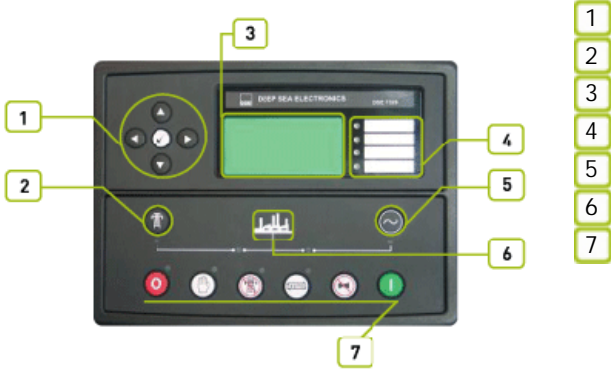

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

% &1 *(' žFG&' &žFG(,) ž

AJD 275

John Deere
Mecc Alte
D+ &''

f@#@Bt
f@#@!@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-)\$

6G'9B'*\$\$\$!*&

6G'9B'*\$\$\$!*(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AJD 275

John Deere
Mecc Alte
D+ & "

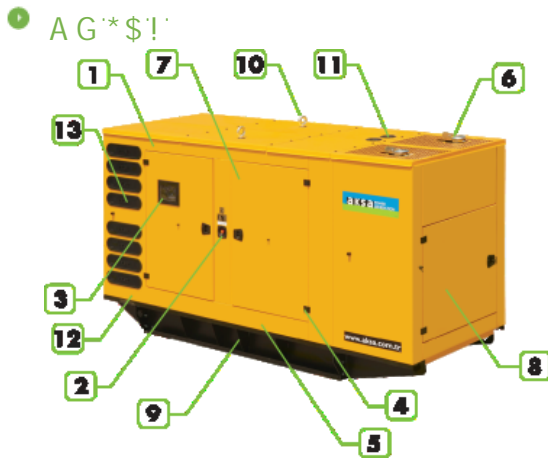

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470